




Luvanto
Luxury Design Flooring

CLICK+ TECHNICAL SPECIFICATION

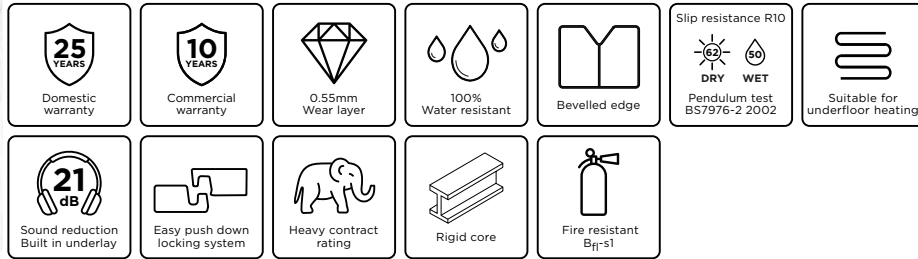

| Characteristics | Test Method | Click+ |
|-----------------------------|-----------------------------|------------------------------------------|
| Warranty (Years) | - | Domestic 25 Commercial 10 |
| Level of Use | EN685 | Heavy Domestic 23 Heavy Commercial 33 |
| Total Thickness | EN428 | 5.0mm (including 1.0mm IXPE underlay) |
| Wear Layer | EN429 | 0.55mm |
| Total Weight | EN430 | 8.18kg/m ² |
| Dimensions (Planks) | EN427 | 180mm x 1220mm |
| Dimensions (Sparkle) | EN427 | - |
| Dimensions (Tiles) | EN427 | 305mm x 610mm |
| Dimensions (Herringbone) | EN427 | - |
| Surface Treatment | - | PU |
| Sound Reduction | ISO 10140-3/ISO717-2 | 21dB |
| Slip Resistance | DIN 51130 | R10 |
| Pendulum Test | BS7976-2:2002 | Dry 62 (Low) / Wet 50 (Low) |
| Abrasion Resistance | EN660-2 | Wear Group P |
| Residual Indentation | EN433 | <0.1mm |
| Castor Chair Resistance | EN425/ISO 4918 25000 cycles | Pass |
| Colour Fastness to Light | ISO 105 B02 | >6 |
| Dimensional Stability | EN434 | <0.25% |
| Squareness and Straightness | EN427 | <0.08mm / <0.10mm |
| Stain Resistance | EN423 | Pass |
| Flammability | EN13501-1:2007 | Bfl-S1 |
| Formaldehyde Emission | EN14041:2004 | Class E1 |
| Fungi Resistance | ISO846 | Growth Intensity 0 |
| Water Resistant | - | 100% |
| VOC Emission | - | A+ |
| REACH | EC No 1907/2006 | Pass |
| Underfloor Heating | - | Suitable, Max 27°C |

| Product | Size | Pack Coverage | Pieces Per Pack | Boxes Per Pallet | Bevelled Edge |
|-----------------|------------------------|--------------------|-----------------|------------------|---------------|
| Click+ - Planks | 180mm x 1220mm x 5.0mm | 2.20m ² | 10 | 35 | Micro-Bevel |
| Click+ - Tiles | 305mm x 610mm x 5.0mm | 2.22m ² | 12 | 36 | Micro-Bevel |